



**AMERICAN
PVC PIPES**

CONDUIT PVC PIPE SCH 80

Rigid nonmetallic PVC conduit - extra heavy wall

UL 651 CERTIFIED

PRODUCT INFORMATION

Rigid nonmetallic PVC conduit, Schedule 80, extra heavy wall, for aboveground and underground electrical raceway applications.

PRODUCT TYPE:


PVC-U Conduit

TRADE SIZE:

1/2"

LENGTH: 10 ft

WALL: SCH 80



PRODUCT SPECIFICATIONS

Trade Size	Nominal	Avg. OD	OD Tol.	Wall Min.	Wall Max.	ID
1/2"	21 mm	0.840 in	±0.0039 in	0.147 in	0.167 in	0.502 in

Factory reference: 104417

Lengths: 3.05 m (10 ft) standard; 6.1 m (20 ft) available for export presentations. Technical dimensions based on manufacturer data.

UL 651 certified Schedule 80 rigid PVC conduit. Product labeling identifies aboveground and underground extra-heavy-wall use.



CONTACT US

sales@americanpvcpipes.com
+1 347 722 1814

GET CONNECT

www.americanpvcpipes.com

TECHNICAL SOURCE

GERFOR Manual MN-DD-002-3
March 2025



**AMERICAN
PVC PIPES**

CONDUIT PVC PIPE SCH 80

Rigid nonmetallic PVC conduit - extra heavy wall

UL 651 CERTIFIED

PRODUCT INFORMATION

Rigid nonmetallic PVC conduit, Schedule 80, extra heavy wall, for aboveground and underground electrical raceway applications.

PRODUCT TYPE:


PVC-U Conduit

TRADE SIZE:

3/4"

LENGTH: 10 ft

WALL: SCH 80



PRODUCT SPECIFICATIONS

Trade Size	Nominal	Avg. OD	OD Tol.	Wall Min.	Wall Max.	ID
3/4"	26 mm	1.050 in	±0.0039 in	0.154 in	0.174 in	0.698 in

Factory reference: 104418

Lengths: 3.05 m (10 ft) standard; 6.1 m (20 ft) available for export presentations. Technical dimensions based on manufacturer data.

UL 651 certified Schedule 80 rigid PVC conduit. Product labeling identifies aboveground and underground extra-heavy-wall use.



CONTACT US

sales@americanpvcpipes.com
+1 347 722 1814

GET CONNECT

www.americanpvcpipes.com

TECHNICAL SOURCE

GERFOR Manual MN-DD-002-3
March 2025



**AMERICAN
PVC PIPES**

CONDUIT PVC PIPE SCH 80

Rigid nonmetallic PVC conduit - extra heavy wall

UL 651 CERTIFIED

PRODUCT INFORMATION

Rigid nonmetallic PVC conduit, Schedule 80, extra heavy wall, for aboveground and underground electrical raceway applications.

PRODUCT TYPE:


PVC-U Conduit

TRADE SIZE:

1"

LENGTH: 10 ft

WALL: SCH 80



PRODUCT SPECIFICATIONS

Trade Size	Nominal	Avg. OD	OD Tol.	Wall Min.	Wall Max.	ID
1"	33 mm	1.315 in	±0.0051 in	0.179 in	0.200 in	0.910 in

Factory reference: 104419

Lengths: 3.05 m (10 ft) standard; 6.1 m (20 ft) available for export presentations. Technical dimensions based on manufacturer data.

UL 651 certified Schedule 80 rigid PVC conduit. Product labeling identifies aboveground and underground extra-heavy-wall use.



CONTACT US

sales@americanpvcpipes.com
+1 347 722 1814

GET CONNECT

www.americanpvcpipes.com

TECHNICAL SOURCE

GERFOR Manual MN-DD-002-3
March 2025



**AMERICAN
PVC PIPES**

CONDUIT PVC PIPE SCH 80

Rigid nonmetallic PVC conduit - extra heavy wall

UL 651 CERTIFIED

PRODUCT INFORMATION

Rigid nonmetallic PVC conduit, Schedule 80, extra heavy wall, for aboveground and underground electrical raceway applications.

PRODUCT TYPE:


PVC-U Conduit

TRADE SIZE:

1-1/4"

LENGTH: 10 ft

WALL: SCH 80

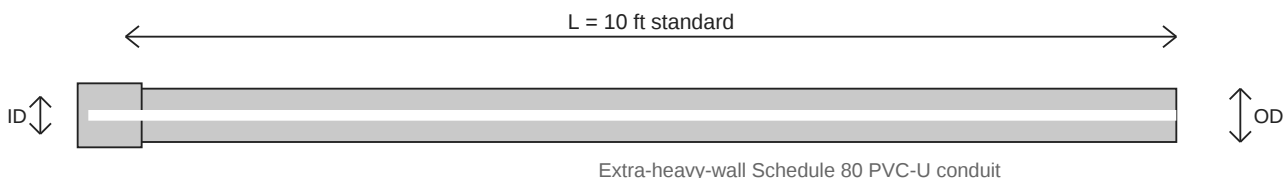

PRODUCT SPECIFICATIONS

Trade Size	Nominal	Avg. OD	OD Tol.	Wall Min.	Wall Max.	ID
1-1/4"	42 mm	1.660 in	±0.0051 in	0.191 in	0.214 in	1.227 in

Factory reference: 104420

Lengths: 3.05 m (10 ft) standard; 6.1 m (20 ft) available for export presentations. Technical dimensions based on manufacturer data.

UL 651 certified Schedule 80 rigid PVC conduit. Product labeling identifies aboveground and underground extra-heavy-wall use.



CONTACT US

sales@americanpvcpipes.com
+1 347 722 1814

GET CONNECT

www.americanpvcpipes.com

TECHNICAL SOURCE

GERFOR Manual MN-DD-002-3
March 2025



**AMERICAN
PVC PIPES**

CONDUIT PVC PIPE SCH 80

Rigid nonmetallic PVC conduit - extra heavy wall

UL 651 CERTIFIED

PRODUCT INFORMATION

Rigid nonmetallic PVC conduit, Schedule 80, extra heavy wall, for aboveground and underground electrical raceway applications.

PRODUCT TYPE:


PVC-U Conduit

TRADE SIZE:

1-1/2"

LENGTH: 10 ft

WALL: SCH 80

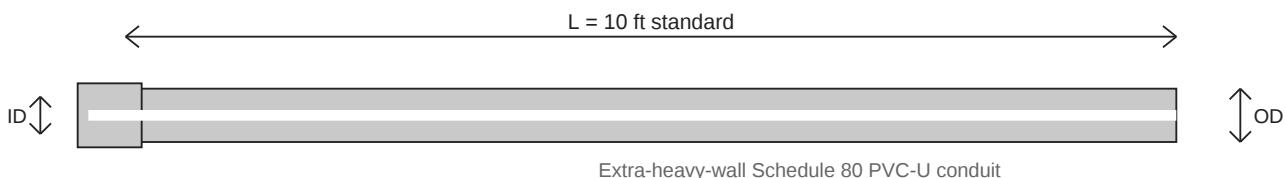

PRODUCT SPECIFICATIONS

Trade Size	Nominal	Avg. OD	OD Tol.	Wall Min.	Wall Max.	ID
1-1/2"	48 mm	1.900 in	±0.0059 in	0.200 in	0.224 in	1.446 in

Factory reference: 104421

Lengths: 3.05 m (10 ft) standard; 6.1 m (20 ft) available for export presentations. Technical dimensions based on manufacturer data.

UL 651 certified Schedule 80 rigid PVC conduit. Product labeling identifies aboveground and underground extra-heavy-wall use.



CONTACT US

sales@americanpvcpipes.com
+1 347 722 1814

GET CONNECT

www.americanpvcpipes.com

TECHNICAL SOURCE

GERFOR Manual MN-DD-002-3
March 2025



**AMERICAN
PVC PIPES**

CONDUIT PVC PIPE SCH 80

Rigid nonmetallic PVC conduit - extra heavy wall

UL 651 CERTIFIED

PRODUCT INFORMATION

Rigid nonmetallic PVC conduit, Schedule 80, extra heavy wall, for aboveground and underground electrical raceway applications.

PRODUCT TYPE:


PVC-U Conduit

TRADE SIZE:

2"

LENGTH: 10 ft

WALL: SCH 80

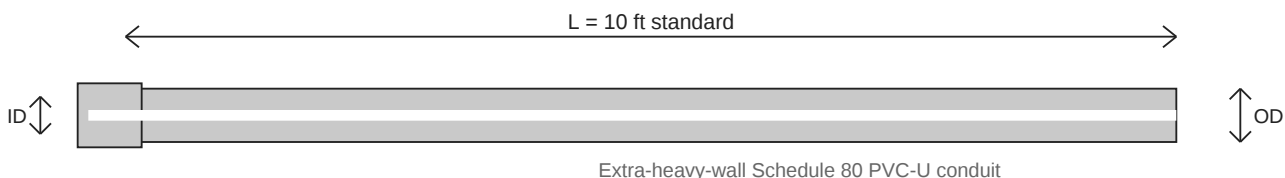

PRODUCT SPECIFICATIONS

Trade Size	Nominal	Avg. OD	OD Tol.	Wall Min.	Wall Max.	ID
2"	60 mm	2.375 in	±0.0059 in	0.218 in	0.244 in	1.881 in

Factory reference: 104422

Lengths: 3.05 m (10 ft) standard; 6.1 m (20 ft) available for export presentations. Technical dimensions based on manufacturer data.

UL 651 certified Schedule 80 rigid PVC conduit. Product labeling identifies aboveground and underground extra-heavy-wall use.



CONTACT US

sales@americanpvcpipes.com
+1 347 722 1814

GET CONNECT

www.americanpvcpipes.com

TECHNICAL SOURCE

GERFOR Manual MN-DD-002-3
March 2025



**AMERICAN
PVC PIPES**

CONDUIT PVC PIPE SCH 80

Rigid nonmetallic PVC conduit - extra heavy wall

UL 651 CERTIFIED

PRODUCT INFORMATION

Rigid nonmetallic PVC conduit, Schedule 80, extra heavy wall, for aboveground and underground electrical raceway applications.

PRODUCT TYPE:


PVC-U Conduit

TRADE SIZE:

2-1/2"

LENGTH: 10 ft

WALL: SCH 80

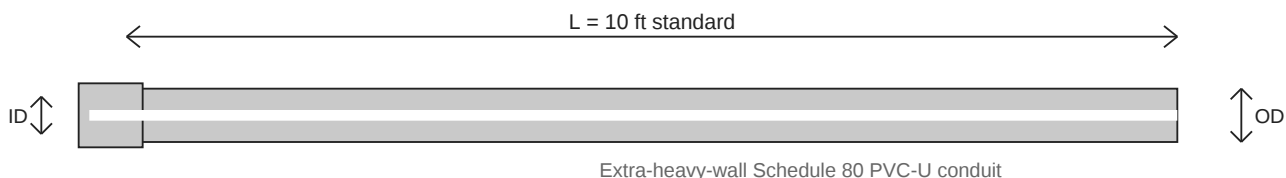

PRODUCT SPECIFICATIONS

Trade Size	Nominal	Avg. OD	OD Tol.	Wall Min.	Wall Max.	ID
2-1/2"	77 mm	2.875 in	±0.0071 in	0.276 in	0.309 in	2.250 in

Factory reference: 104423

Lengths: 3.05 m (10 ft) standard; 6.1 m (20 ft) available for export presentations. Technical dimensions based on manufacturer data.

UL 651 certified Schedule 80 rigid PVC conduit. Product labeling identifies aboveground and underground extra-heavy-wall use.



CONTACT US

sales@americanpvcpipes.com
+1 347 722 1814

GET CONNECT

www.americanpvcpipes.com

TECHNICAL SOURCE

GERFOR Manual MN-DD-002-3
March 2025



**AMERICAN
PVC PIPES**

CONDUIT PVC PIPE SCH 80

Rigid nonmetallic PVC conduit - extra heavy wall

UL 651 CERTIFIED

PRODUCT INFORMATION

Rigid nonmetallic PVC conduit, Schedule 80, extra heavy wall, for aboveground and underground electrical raceway applications.

PRODUCT TYPE:


PVC-U Conduit

TRADE SIZE:

3"

LENGTH: 10 ft

WALL: SCH 80

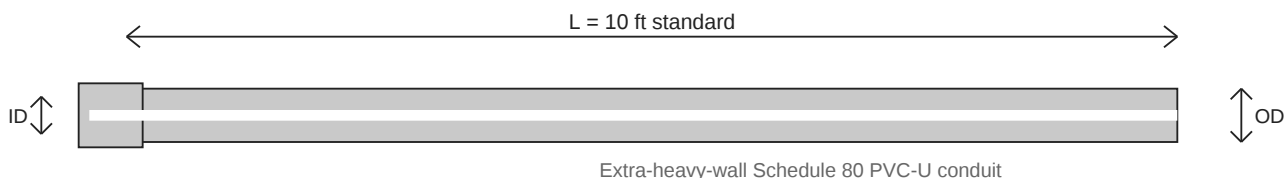

PRODUCT SPECIFICATIONS

Trade Size	Nominal	Avg. OD	OD Tol.	Wall Min.	Wall Max.	ID
3"	88 mm	3.500 in	±0.0079 in	0.300 in	0.336 in	2.820 in

Factory reference: 104424

Lengths: 3.05 m (10 ft) standard; 6.1 m (20 ft) available for export presentations. Technical dimensions based on manufacturer data.

UL 651 certified Schedule 80 rigid PVC conduit. Product labeling identifies aboveground and underground extra-heavy-wall use.



CONTACT US

sales@americanpvcpipes.com
+1 347 722 1814

GET CONNECT

www.americanpvcpipes.com

TECHNICAL SOURCE

GERFOR Manual MN-DD-002-3
March 2025



**AMERICAN
PVC PIPES**

CONDUIT PVC PIPE SCH 80

Rigid nonmetallic PVC conduit - extra heavy wall

UL 651 CERTIFIED

PRODUCT INFORMATION

Rigid nonmetallic PVC conduit, Schedule 80, extra heavy wall, for aboveground and underground electrical raceway applications.

PRODUCT TYPE:


PVC-U Conduit

TRADE SIZE:

3-1/2"

LENGTH: 10 ft

WALL: SCH 80

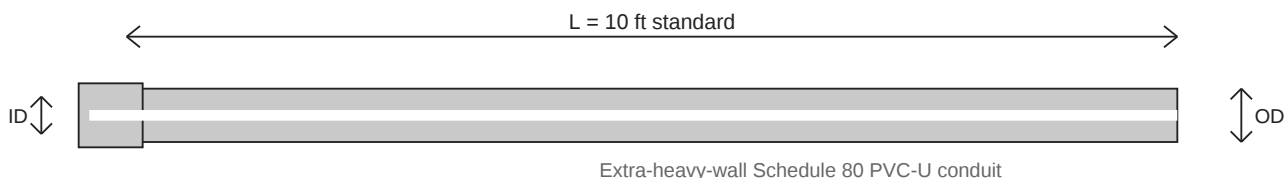

PRODUCT SPECIFICATIONS

Trade Size	Nominal	Avg. OD	OD Tol.	Wall Min.	Wall Max.	ID
3-1/2"	101 mm	4.000 in	±0.0079 in	0.318 in	0.356 in	3.280 in

Factory reference: 104425

Lengths: 3.05 m (10 ft) standard; 6.1 m (20 ft) available for export presentations. Technical dimensions based on manufacturer data.

UL 651 certified Schedule 80 rigid PVC conduit. Product labeling identifies aboveground and underground extra-heavy-wall use.



CONTACT US

sales@americanpvcpipes.com
+1 347 722 1814

GET CONNECT

www.americanpvcpipes.com

TECHNICAL SOURCE

GERFOR Manual MN-DD-002-3
March 2025



**AMERICAN
PVC PIPES**

CONDUIT PVC PIPE SCH 80

Rigid nonmetallic PVC conduit - extra heavy wall

UL 651 CERTIFIED

PRODUCT INFORMATION

Rigid nonmetallic PVC conduit, Schedule 80, extra heavy wall, for aboveground and underground electrical raceway applications.

PRODUCT TYPE:


PVC-U Conduit

TRADE SIZE:

4"

LENGTH: 10 ft

WALL: SCH 80

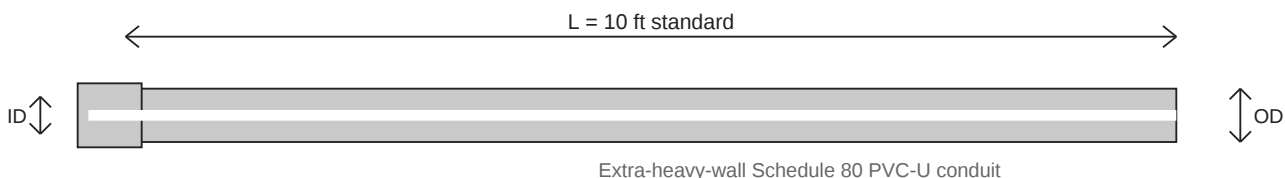

PRODUCT SPECIFICATIONS

Trade Size	Nominal	Avg. OD	OD Tol.	Wall Min.	Wall Max.	ID
4"	114 mm	4.500 in	±0.0091 in	0.337 in	0.377 in	3.737 in

Factory reference: 104426

Lengths: 3.05 m (10 ft) standard; 6.1 m (20 ft) available for export presentations. Technical dimensions based on manufacturer data.

UL 651 certified Schedule 80 rigid PVC conduit. Product labeling identifies aboveground and underground extra-heavy-wall use.



CONTACT US

sales@americanpvcpipes.com
+1 347 722 1814

GET CONNECT

www.americanpvcpipes.com

TECHNICAL SOURCE

GERFOR Manual MN-DD-002-3
March 2025



**AMERICAN
PVC PIPES**

CONDUIT PVC PIPE SCH 80

Rigid nonmetallic PVC conduit - extra heavy wall

UL 651 CERTIFIED

PRODUCT INFORMATION

Rigid nonmetallic PVC conduit, Schedule 80, extra heavy wall, for aboveground and underground electrical raceway applications.

PRODUCT TYPE:


PVC-U Conduit

TRADE SIZE:

5"

LENGTH: 10 ft

WALL: SCH 80

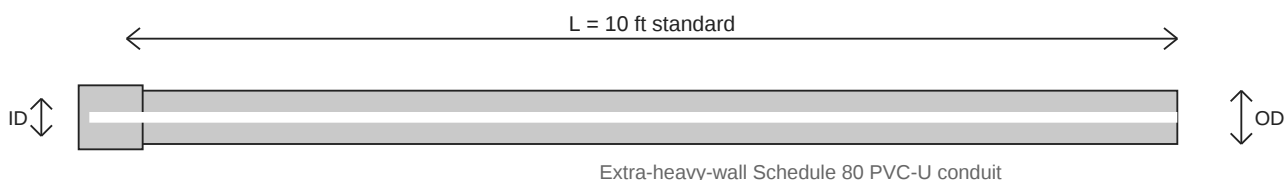

PRODUCT SPECIFICATIONS

Trade Size	Nominal	Avg. OD	OD Tol.	Wall Min.	Wall Max.	ID
5"	141 mm	5.563 in	±0.0098 in	0.375 in	0.420 in	4.713 in

Factory reference: 104427

Lengths: 3.05 m (10 ft) standard; 6.1 m (20 ft) available for export presentations. Technical dimensions based on manufacturer data.

UL 651 certified Schedule 80 rigid PVC conduit. Product labeling identifies aboveground and underground extra-heavy-wall use.



CONTACT US

sales@americanpvcpipes.com
+1 347 722 1814

GET CONNECT

www.americanpvcpipes.com

TECHNICAL SOURCE

GERFOR Manual MN-DD-002-3
March 2025



**AMERICAN
PVC PIPES**

CONDUIT PVC PIPE SCH 80

Rigid nonmetallic PVC conduit - extra heavy wall

UL 651 CERTIFIED

PRODUCT INFORMATION

Rigid nonmetallic PVC conduit, Schedule 80, extra heavy wall, for aboveground and underground electrical raceway applications.

PRODUCT TYPE:


PVC-U Conduit

TRADE SIZE:

6"

LENGTH: 10 ft

WALL: SCH 80

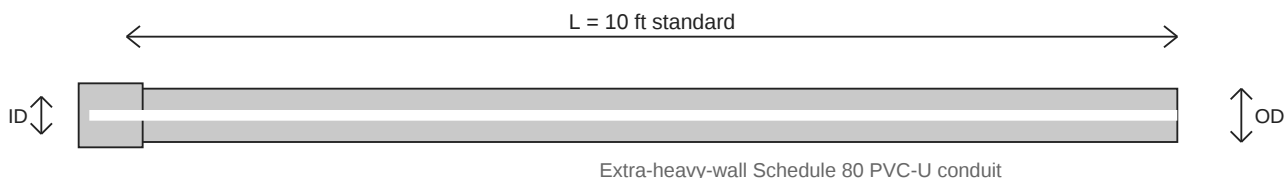

PRODUCT SPECIFICATIONS

Trade Size	Nominal	Avg. OD	OD Tol.	Wall Min.	Wall Max.	ID
6"	168 mm	6.625 in	±0.0110 in	0.432 in	0.484 in	5.646 in

Factory reference: 104428

Lengths: 3.05 m (10 ft) standard; 6.1 m (20 ft) available for export presentations. Technical dimensions based on manufacturer data.

UL 651 certified Schedule 80 rigid PVC conduit. Product labeling identifies aboveground and underground extra-heavy-wall use.



CONTACT US

sales@americanpvcpipes.com
+1 347 722 1814

GET CONNECT

www.americanpvcpipes.com

TECHNICAL SOURCE

GERFOR Manual MN-DD-002-3
March 2025